


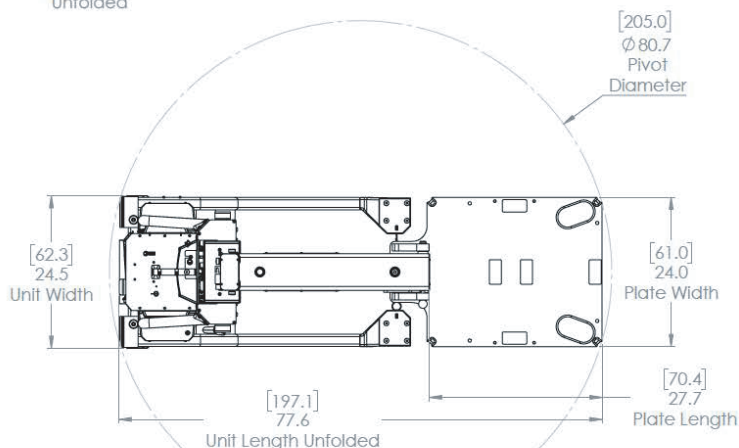
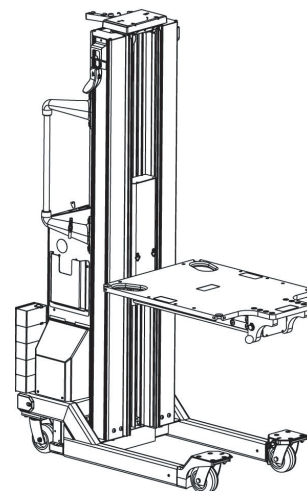


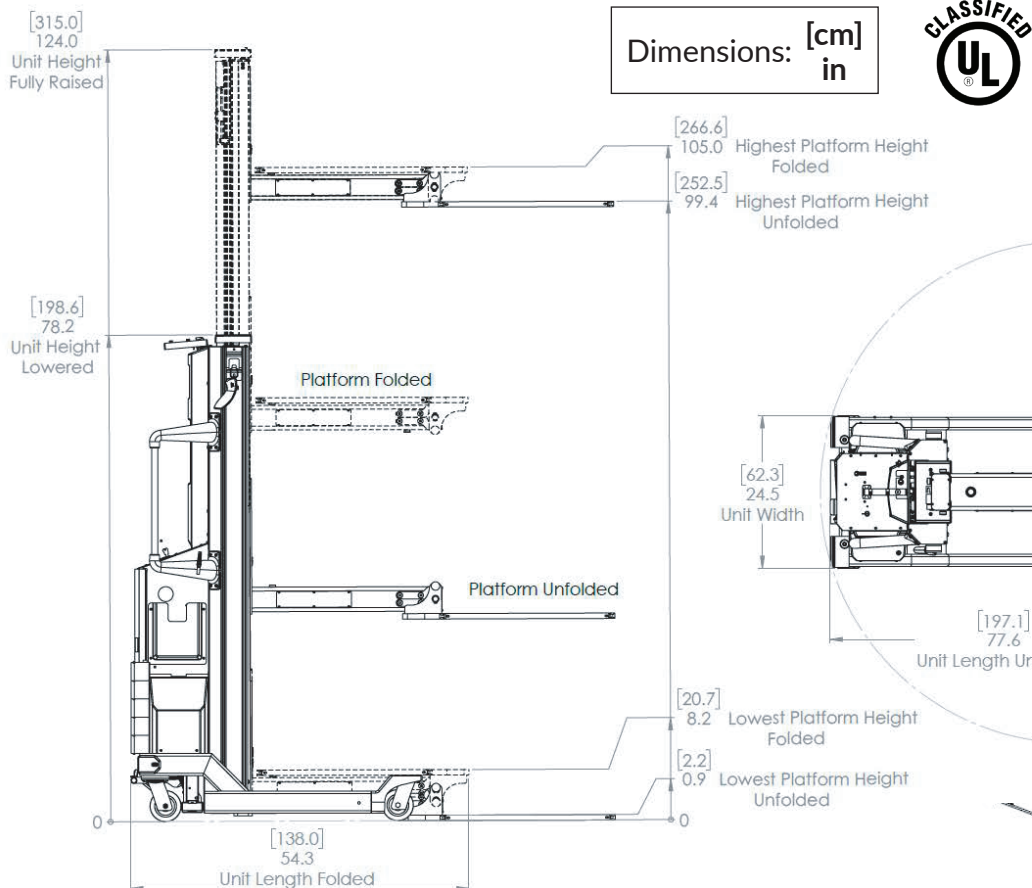

SL-1000XPL FOLDING PLATFORM Electric Data Center Lift




Push joystick to move platform



- ✓ The pendant can hang on either side of the lift.
- ✓ The pendant has progressive speed control for precise equipment positioning.
- ✓ The safety button must be held throughout the

Hang pendant on left or right side

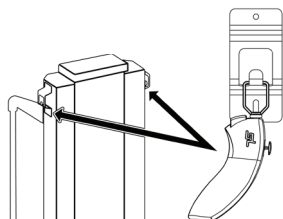


Pull knob releases fold lock


Handle to flip plate

Adjustable Platform Angle

Front Caster Swivel Lock Operation



CASTER UNLOCKED
Key turned horizontally



CASTER LOCKED
Key turned vertically

Capacity

DESCRIPTION	US (lb)	METRIC (kg)
Platform center (Platform folded)	1000	400
Platform rear (Unfolded, 22" server)	600	272
Platform rear (Unfolded, 32" server)	450	204

Weight

DESCRIPTION	US (lb)	METRIC (kg)
Total unit weight	710	323
Shipping weight	-	-