





- ✓ EASIER INSTALLATION/REMOVAL: Safely tilts servers for better alignment with slotted rails.
- ✓ **IMPROVED SAFETY:** Ensures proper nailhead alignment to prevent awkward handling.
- ✓ **FULLY COMPATIBLE:** Works with all ServerLIFT machines.
- ✓ **VERSATILE SUPPORT:** Supports servers at any angle or level for simple setups.
- ✓ EFFICIENT FOR ONE TECH: Allows a single technician to handle heavy server installations.
- ✓ ADJUSTABLE TILT: Operator controls tilt angle for precise adjustments.

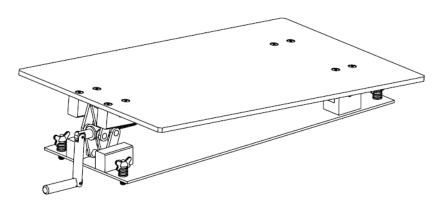

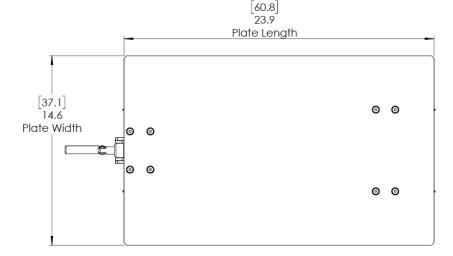

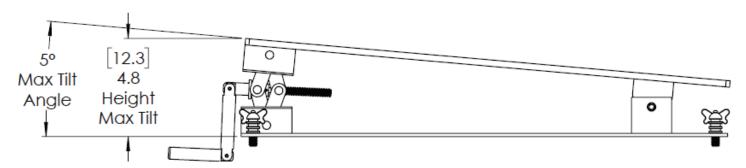

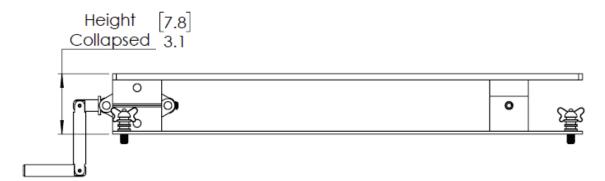

Capacity

Dimensions: [cm]

DESCRIPTION	US (Ib)	METRIC (kg)
Max load rating	500	227

This is the accessory load rating. The maximum weight you can load onto the attachment is determined by the capacity of the lift to which the accessory is connected.

Weight

DESCRIPTION	US (lb)	METRIC (kg)
Total unit weight	20	9
Shipping weight	25	11.3

Specs.rs500x.v00 © ServerLIFT LLC, Phoenix, AZ 85023